

Housing, IR housing, bracket and IR illumination (order separately)

Housing

CSAH132E/CSAH132



CSAH132E: empty housing with mount

- IP67, vandal proof
- Suitable camera dimension (W x H x L): 110 mm x 70 mm x 250 mm



CSAH132-24: AC 24 V
CSAH132-D: AC 24 V & DC 12V
CSAH132-230V: AC 230 V


- IP67, vandal proof
- Suitable camera dimension (W x H x L): Less than 105 mm x 80 mm x 300 mm

Housing

CSAH134



- IP68, vandal proof, die-coast Aluminum alloy construction, -40 ~ 50 °C, heater & blower

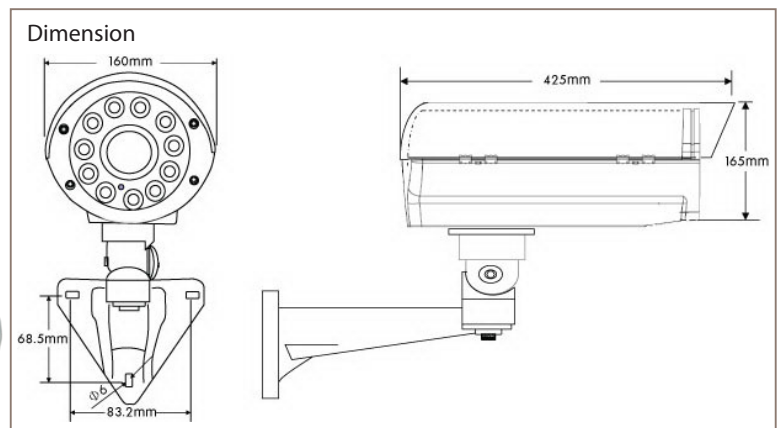

CSAH133-70-24V: AC 24 V, 70 m IR
CSAH134-70-AC90-240V: AC 90 ~ 240 V, 70 m IR

Bracket

CSAB149/150/151



- Max. Load: 3 kg/5 kg
- Metal
- 90 mm/130 mm/170 mm

Bracket

CSAB152



- Max. Load: 1.5 kg
- Aluminum & plastic, beige
- 115 mm


IR Illuminator

ISAI401



ISAI401-40: 40 m IR
ISAI401-60: 60 m IR
ISAI401-70: 70 m IR

Dimension

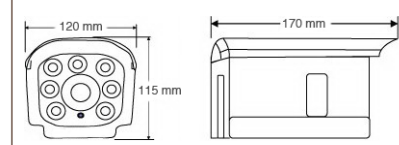

- IP66, -20 ~ 50 °C