

IP WDR outdoor dome camera, 1.3 Megapixel real time, with lens, H.264/MPEG4/JPEG, 2-way audio, PoE, SD/SDHC card




- Sony 1/3" 1.3 Megapixel progressive Exmor™ CMOS sensor
- Super low Lux, Color: 0.2 Lux @ F 1.2, B/W: 0.01 Lux @ F 1.2
- Built-in f = 3.0 ~ 10 mm/F 1.3, 2.0 Megapixel varifocal D/N lens
- Compression: H.264/MPEG-4/MJPEG (triple-code encoder)
- Highest Resolution: 1280 x 1024 @ 30 fps, H.264/highprofile
- Support micro SD/SDHC card
- Support both ONVIF and PSIA

Specification

	Model Name	ISM3121S
Video	Image Sensor	Sony 1/3" 1.3 Megapixel progressive Exmor™ CMOS
	Network Compression	Triple Streams: H.264/MPEG-4/MJPEG
	Pixels (H x V)	1280 x 1024, 1280 x 960, 1280 x 720, 720 x 480
	Max. Frame Rate	Up to 30 fps for all video profile
	Mechanical IR Cut Filter	N/A
	Digital D/N Mode	Auto/color/black & white
	Motion Detection	Yes
	Motion Alarm Trigger	Yes
	Timer Clock	Yes
	Image Setting	Brightness/contrast/AWB/sharpness/saturation/rotation/mirror/WDR
	Electronic Shutter	Auto: 1/60 to 1/2,000 sec (60 Hz); 1/50 to 1/2,000 sec (50 Hz)
	Manual Electronic Shutter	1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/120, 1/250, 1/500, 1/750, 1/1000, 1/1500, 1/2000 sec
	White Balance	Auto/manual (1800 K ~ 10,000 K)
	Signal to Noise Ratio	More than 52 dB (AGC off)
	Network	Dynamic Noise Reduction
Digital Wide Dynamic Range		10 levels (adjustable level settings)
Video Output		1.0 Vpp composite, 75 Ω (BNC) or YPbPr
Min. Illumination		Color: 0.2 Lux @ F 1.2, B/W: 0.01 Lux @ F 1.2
Lens		f = 3.0 ~ 10 mm/F1.3, 2.0 Megapixel varifocal D/N lens / 95.6° ~ 28.8°
Safety		ID/password protection, IP address filtering, user access log
Protocol		TCP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, ARP, UPnP, RTSP RTP, Ethernet (RJ-45 wired 10/100 Base-TX)
Bit Rate Transmission		64 up to 10,000 kbps
Number of User		Max. 10 connections for singal video
Storage Capacity		SD/SDHC card
Audio	Alarm Event	File upload via ftp and email/notification via email, HTTP, external digital output activation, Micro SD recording
	Audio Communication	2-way audio; G.711 (μLaw), 8 kHz sample rate
General	Connectors	Audio, RJ45/PoE, DC power jack, BNC (composite video out), alarm reset/alarm in/alarm out/ alarm ground/RS485
	Operation Voltage	DC 12 V/PoE; max. 4 W
	Dimension (D x H)/Weight	140 mm x 112 mm/950 g
	Operation Temperature	-10 °C ~ +50 °C, relative moisture 20 % ~ 90 %
	Storage Temperature	-20 °C ~ +60 °C
	Max. Breaking Strength	656.1 kgf
	Waterproof	IP66

*Design and specifications are subject to change without prior notice.

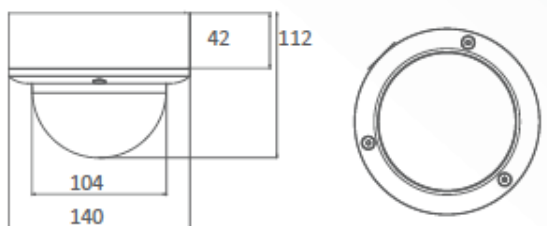

Unit: mm