

IP outdoor dome camera, 3.0 Megapixel real time, H.264/MPEG4/JPEG, 2-way audio, PoE, SD/SDHC card




- Sony 1/2.8" 3.0 Megapixel progressive Exmor™ CMOS sensor
- Low Lux, Color: 0.2 Lux @ F 1.2, B/W: 0.01 Lux @ F 1.2
- Built-in f = 3.0 ~ 10 mm/F 1.3, 2.0 Megapixel varifocal lens
- Compression: H.264, MPEG-4, MJPEG (triple-code encoder)
- Highest Resolution: 2048 x 1536 @ 20 fps, H.264/highprofile
- Support DC 12 V & PoE (802.3af) power input
- Support micro SD/SDHC card
- Support both ONVIF and PSIA

Specification

	Model Name	ISM3422S
Video	Image Sensor	Sony 1/2.8" 3.0 Megapixel progressive Exmor™ CMOS
	Network Compression	Triple Streams: H.264/MPEG-4/MJPEG
	Pixels (H x V)	2048 x 1536, 1920 x 1080, 1280 x 1024, 1280 x 960, 1280 x 720, 720 x 480
	Max. Frame Rate	2048 x 1536 @ 20 fps, others up to 30 fps
	Mechanical IR Cut Filter	-
	Digital D/N Mode	Auto/color/black & white
	Motion Detection	Yes
	Motion Alarm Trigger	Yes
	Timer Clock	Yes
	Image Setting	Brightness/contrast/AWB/sharpness/saturation/rotation/mirror/WDR
	Electronic Shutter	Auto: 1/60 to 1/2,000 sec (60 Hz); 1/50 to 1/2,000 sec (50 Hz)
	Manual Electronic Shutter	1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/120, 1/250, 1/500, 1/750, 1/1000, 1/1500, 1/2000 sec
	White Balance	Auto/manual (1800 K ~ 10,000 K)
	Signal to Noise Ratio	More than 52 dB (AGC off)
Network	Dynamic Noise Reduction	2D DNR
	Digital Wide Dynamic Range	10 levels (adjustable level settings)
	Video Output	1.0 Vpp composite, 75 Ω (BNC) or YPbPr
	Min. Illumination	Color: 0.2 Lux @ F 1.2, B/W: 0.01 Lux @ F 1.2
	Lens	f = 3.0 ~ 10 mm/F 1.3, 2.0 Megapixel varifocal lens/95.6° ~ 28.8°
	Safety	ID/password protection, IP address filtering, user access log
	Protocol	TCP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, ARP, UPnP, RTSP RTP, Ethernet (RJ-45 wired 10/100 Base-TX)
	Bit Rate Transmission	64 up to 10,000 kbps
	Number of User	Max. 10 connections for single video
	Storage Capacity	SD/SDHC card
Audio	Alarm Event	File upload via ftp and email/notification via email, HTTP, external digital output activation, micro SD recording
General	Audio Communication	2-way audio; G.711 (μLaw), 8 kHz sample rate
	Connectors	YPbPr/audio, RJ45/PoE, DC power jack, BNC (composite video out), alarm reset/alarm in/alarm out/alarm ground/RS485, micro SD, mini USB
	Operation Voltage	DC 12V/PoE; max. 4 W
	Dimension (D x H)/Weight	140 mm x 112 mm/950 g
	Operation Temperature	-10 °C ~ +50 °C, relative moisture 20 % ~ 90 %
	Storage Temperature	-20 °C ~ +60 °C
	Max. Breaking Strength	656.1 kgf
Waterproof	IP66	

*Design and specifications are subject to change without prior notice.

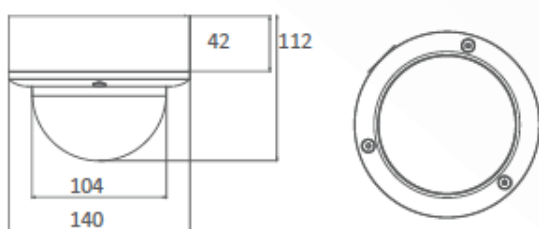

Unit: mm